

01/07/99

JCS20 U.S. PTO

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000 OMB 0651-0032

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	90401-1
	First Inventor or Application Identifier	Glen E. Thurber
	Title	GRAPHITE ARROW AND METHOD OF MANUFACTURE
Express Mail Label No.		EL141934739US

**APPLICATION ELEMENTS**  
 See MPEP chapter 600 concerning utility patent application contents

**ADDRESS TO:**  
 Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
 (Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages] **18**  
 (preferred arrangement set forth below)  
 - Descriptive title of the invention  
 - Cross References to Related Applications  
 - Statement Regarding Fed sponsored R & D  
 - Reference to Microfile Appendix  
 - Background of the Invention  
 - Brief Summary of the Invention  
 - Brief Description of the Drawings (if filed)  
 - Detailed Description  
 - Claim(s)  
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets] **2**
4. Oath or Declaration [Total Pages] **1**  
 a. ☒ Newly executed (original or copy)  
 b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
 (for continuation/divisional) with Box 16 completed  
 i. ☐ **DELETION OF INVENTOR(S)**  
 Signed statement attached deleting  
 inventor(s) named in the prior application,  
 see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfilm Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
 (if applicable, all necessary)  
 a. ☐ Computer Readable Copy  
 b. ☐ Paper Copy (identical to computer copy)  
 c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney  
 (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
 (Should be specifically itemized)
13. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,  
 (PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)  
 (if foreign priority is claimed)
15. ☒ Other: **Transmittal Cover Letter with Certificate of Express Mail**

\* NOTE FOR ITEMS 1 & 15: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_  
 Prior application information Examiner \_\_\_\_\_ Group / Art Unit \_\_\_\_\_  
 For **CONTINUATION or DIVISIONAL APPS** only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Gerald E. Helget				
	Mackall, Crounse & Moore, PLC				
Address	1400 AT&T Tower				
	901 Marquette Avenue				
City	Minneapolis	State	MN	Zip Code	55402
Country	U.S.A.	Telephone	(612) 305-1416	Fax	(612) 305-1414

Name (Print/Type)	Gerald E. Helget	Registration No. (Attorney/Agent)	30,948
Signature	<i>Gerald E. Helget</i>	Date	7/26/98

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Re. Appln.: Glen E. Thurber  
Serial No.: Not yet assigned  
Filed: January 7, 1999  
For: GRAPHITE ARROW AND METHOD OF MANUFACTURE  
Attorney: Gerald E. Helget  
Attorney  
Docket No.: 90401-1  
Additional  
Fees: Charge to Deposit Account 50-0475

BOX PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

TRANSMITTAL COVER LETTER

Enclosed for filing, please find the following:

1. Utility Patent Application Transmittal;
2. Fee Transmittal for FY 1999;
3. Specification with claims;
4. Two sheets of formal drawings;
5. Small Entity Declaration;
6. Declaration and Power of Attorney for Original Application;
7. Check in the amount of \$380.00; and
8. Postcard receipt.

Respectfully submitted,

Dated: 7 Jan 99

By Gerald E. Helget

Gerald E. Helget (Reg. No. 20,948)  
Mackall, Crounse & Moore, PLC  
1400 AT&T Tower  
901 Marquette Avenue  
Minneapolis, MN 55402-2859  
Telephone: 612-305-1416

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this document, along with the documents referenced above, are being deposited with the United States Postal Service as Express Mail, Receipt No. EL141934739US, in an envelope addressed to: BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231, on the date indicated below.

By Gerald E. Helget

Date 7 Jan 99

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Re. Appln.: Glen E. Thurber  
Serial No.: Not yet assigned  
Filed: January 7, 1999  
For: GRAPHITE ARROW AND METHOD OF MANUFACTURE  
Attorney: Gerald E. Helget  
Attorney  
Docket No.: 90401-1  
Additional  
Fees: Charge to Deposit Account 50-0475

BOX PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:


**SMALL ENTITY VERIFIED STATEMENT AND DECLARATION**  
**BY INDIVIDUAL INVENTOR**

A small entity status is hereby established in the application for U.S. letters patent herein identified for the purpose of paying fees, as follows:

The undersigned inventor: (1) avers that he qualifies as an independent inventor in accordance with 37 CFR § 1.9(c); (2) avers that he has not assigned, granted, conveyed or licensed, and is under no obligation to assign, grant, convey or license any rights in the invention to any other person or entity, not identified herein.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application of any patent issued thereon.

1-2-99  
Date

  
Glen E. Thurber

Inventor	:	Glen E. Thurber
Address	:	3530 Southeast 21st Street Topeka, KS 66607
Citizenship	:	United States of America
Invention	:	GRAPHITE ARROW AND METHOD OF MANUFACTURE

### BACKGROUND OF THE INVENTION

The present invention relates to an archery arrow composed of graphite (carbon) with the carbon fibers running in two mutually, substantially perpendicular directions on the arrow shaft. In addition, the arrow shaft is partially tapered and partially non-tapered.

The earliest known archery arrows were made of wood, usually cedar. These arrows had a number of disadvantages. First, they warped when exposed to moisture. As a result of this warping they were not straight and therefore did not fly straight when released from the bow. In addition, they were quite fragile and broke when they hit a hard object. Furthermore, they did not have sufficient kinetic energy to penetrate targets such as large game animals.

The kinetic energy of an arrow in flight may be calculated according to the formula:

$$E = \frac{\text{weight} \times \text{velocity}^2}{450,240}$$

The disadvantages of wood arrows led to the development of aluminum tubular arrows. These arrows were about 25% lighter than cedar wood arrows and therefore flew faster (about 220 ft/sec), developing more kinetic energy because kinetic energy is related to the square of the velocity. They were also straighter than cedar arrows and did not have a tendency to warp. They were straight throughout the length of the shaft and did not taper.

However, aluminum arrows have a tendency to bend rather than break when they hit a hard object. It can be quite difficult to straighten the arrow after it has been bent.

More recently, carbon (graphite) arrows have been developed. Graphite arrows are constructed from carbon fibers that are pulled off a spool and through a die with eyelets, then through a smaller die and through a bath of polyvinyl or polyester resin and onto a mandrel for curing. After being placed on the mandrel, the carbon fibers and resin are heated to cure

them. The cured product is then removed from the mandrel and cut to appropriate lengths for individual arrows. These arrows also generally had parallel walls (no taper).

These graphite arrows were lighter and tougher than aluminum, and do not bend when striking a hard object. The lighter weight lets them fly faster, developing higher kinetic energy.

These arrows also had a number of disadvantages. The production process left a mold release on the outside of the resin which was quite slippery. In order to fletch such arrows (put the vanes on), the arrows had to be sanded. Furthermore, it was quite difficult to tune these arrows for use with a fixed blade broadhead tip.

To address some of these problems, some manufacturers such as Taylor Falcon, Jonesboro, Arkansas developed carbon arrows with a continuous taper throughout the length of the shaft. However, these arrows did not have commercial success because the sizings were wrong, the weights were inconsistent, and a dealer had to have many different diameter tools to mount tips to the shaft. That is, depending at the point along the taper where the material was cut to length, a different outside diameter of the shaft resulted and a different tool was needed to mount the tip. Furthermore, most of these arrows were constructed of unidirectional fibers, with the fibers running lengthwise along the shaft. There was thus no bracing across the shaft diameter, so that these arrows were relatively fragile. In addition, these arrows tended to have a longer "paradox" or oscillation along the shaft which caused inaccuracy in flight and less penetration after hitting a game animal. Furthermore, they had a relatively limited "spine weight" range of stiffness, so that it was difficult to use them with heavier bow strengths (greater than 70 pounds). Crisscrossing or biasing of fibers has been tried.

There is a need for an improved graphite archery arrow that retains the advantages of tapered arrows while solving the problems of tapered arrows and correcting the problems with graphite arrows with no bias.

### SUMMARY OF THE INVENTION

A graphite archery arrow having an elongate shaft, a fletching portion at one end of the shaft, and a tip portion at the opposite end of the shaft, the shaft consisting of a number of graphite fibers longitudinally oriented along the shaft; a number of graphite fibers biased to the longitudinally oriented graphite fibers; and a binder holding together the longitudinally oriented graphite fibers and the biased graphite fibers. The arrow may also have a tapered portion and a parallel portion. A method of manufacturing the graphite archery arrow is also claimed.

A principal object and advantage of the present invention is that the combination of longitudinally oriented graphite fibers and biased graphite fibers gives great strength to the arrow.

Another principal object and advantage of the present invention is that the arrow does not bend when it hits a hard object.

Another principal object and advantage of the present invention is that the arrow is lighter and weight and therefore flies faster, developing more kinetic energy.

Another object and advantage of the present invention is that there is no mold release on the outside of the arrow, so that extensive sanding is not required.

Another object and advantage of the present invention is that the arrow can be used with a fixed blade broadhead tip.

Another object and advantage of the present invention is that a parallel portion allows the arrow to be sized to almost any length and a tip attached with a single diameter tip adapter. The arrow can also be re-tipped easily if it shatters at some point along the parallel portion.

Another object and advantage of the present invention is that the increased strength allows the tip adapter to go inside the shaft so that it will not grab when removed from the target.

Another object and advantage of the present invention is that a tapered portion behind the parallel portion allows easier penetration into a game animal.

Another object and advantage of the present invention is that it has a shorter paradox than earlier arrows and thus has less oscillation along the shaft resulting in higher accuracy and flatter trajectory in flight. The arrow shoots farther with the same accuracy. This also allows better penetration when the arrow hits a game animal.

Another object and advantage of the present invention is that it has a greater spine weight range than earlier arrows.

Another object and advantage of the present invention is that it has a front of center about 10 to 15% closer to the tip, allowing better tuning for fixed blade broadhead tips.

Another object and advantage of the present invention is that the arrow is easier to tune than earlier arrows.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a right-side elevational view of the graphite archery arrow of the present invention with internal structure indicated by dashed lines.

Fig. 2 is a cross-sectional view along the lines 2-2 of Fig. 1.

Fig. 3 is a schematic showing the materials used in a method of manufacturing the graphite arrow of the present invention.



Fig. 4 is a schematic of the layering of materials in certain steps of the method of manufacturing.

Fig. 5 is a schematic showing a method of rolling a sheet of graphite fibers onto a mandrel, to manufacture the graphite arrow of the present invention.

Fig. 6 is a schematic of the layering of materials in certain steps of the method of manufacturing.

Fig. 7 is a perspective view of the finished product being pulled off a mandrel in the method of manufacturing.

Fig. 8 is a schematic showing removal of polypropylene tape from the finished product in the method of manufacturing.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The graphite archery arrow of the present invention is generally shown in the drawings as reference numeral 10.

The graphite archery arrow 10 has an elongate hollow shaft 12 with interior 14, a fletching portion 16 at one end of the shaft 12, and a tip portion 18 at the other end of the shaft 12.

As can be seen best in Fig. 2, the shaft 12 comprises a plurality of graphite fibers 20 longitudinally oriented along the shaft 12; a plurality of graphite fibers 22 biased to the

longitudinally oriented graphite fibers 20; and a binder 24 holding the longitudinally oriented graphite fibers 20 and biased graphite fibers 22 together.

In the preferred embodiment, the biased graphite fibers 22 are substantially normal (perpendicular) to the longitudinally oriented graphite fibers 20.

Most preferably, the longitudinally oriented graphite fibers 20 have a fiber area weight of about  $120 \text{ g/m}^2$  and the biased graphite fibers 22 have a fiber area weight of about  $70 \text{ g/m}^2$ .

In the preferred embodiment, the binder 24 is a thermoplastic epoxy resin. However, other materials may be used which fill in the spaces between the longitudinally oriented graphite fibers 20 and the biased graphite fibers 22 and cure to form a hard, durable matrix material holding the fibers together.

To give additional strength to the arrow 10, there may be multiple layers of longitudinally oriented graphite fibers 20 and biased graphite fibers 22. Preferably, there are four layers of longitudinally oriented graphite fibers 20 and two layers of biased graphite fibers 22.

The Figures also show that the shaft 12 further comprises a parallel portion 30 of constant diameter and a tapered portion 32 of gradually narrowing diameter. Preferably, the parallel portion 30 is adjacent the tip portion 18 and the tapered portion 32 is adjacent the fletching portion 16. Most preferably, the parallel portion 30 is about 40% of the shaft 12 length and the tapered portion is about 60% of the shaft 12 length.

The Figures also show a tip or pile 34 which may be attached to the tip portion 18 and a string nock 36 which may be attached adjacent the fletching portion 16 of the shaft 12. Vanes 38 are attached to the shaft 12 at the fletching portion 16.

Because of the unique construction of the shaft, the pile 34 may be attached to the shaft 12 by a pile adapter 35 which fits inside the shaft 12, so that the pile adapter 35 does not

present an external surface to snag on the material of a target or game animal. Likewise, the nock 36 may be attached to the shaft 12 by a nock adapter 37 or by itself which fits inside the shaft 12.

In the event that the parallel portion 30 should break due to impact with a hard object, the tip 34 may be removed and remounted on the parallel portion 30 at a point closer to the fletching portion 16 using a single diameter tip adapter. Because the shaft is parallel near the tip portion, there is no need for various diameter mounting tools as would be the case if the shaft 12 were tapered for its entire length.

A novel method of manufacture of the graphite arrow 10 is disclosed as follows. See Figures 3 and 4.

In the first step, a sheet 50 of graphite fibers embedded in a resin 24 is trimmed to produce an elongate longitudinal pattern 52 having a parallel portion 54 with parallel sides 56 and a tapered portion 58 with tapered side 59. The pattern 52 may have an adhesive 60 on its back side. Preferably, the adhesive is present on the back side of the sheet 50 and is covered by a removable backing paper 62. This longitudinal pattern 52 produces the longitudinally oriented graphite fibers 20 of the finished arrow.

Next, the sheet 50 is trimmed to produce a bias pattern 70 of about the length of the longitudinal pattern 52 and with the graphite fibers biased to the direction of the longitudinal pattern. Because the fibers only run in one direction in the sheet 50, the bias pattern 70 can be produced by trimming the sheet 50 across the grain. The bias pattern 70 is also trimmed to have a width less than the width of the longitudinal pattern 52. A sheet 50 of material with a different fiber weight is used than was used to produce the longitudinal pattern 52.

Next, the bias pattern 70 is attached to the longitudinal pattern 52 with the bias pattern offset from the edges 56, 59 of the longitudinal pattern 52. This can conveniently be done by removing the backing paper 62 from the bias pattern 70 and pressing the adhesive 60 against the longitudinal pattern 52.

The longitudinal pattern 52 with attached bias pattern 70 is then attached to an elongate, tapered mandrel 80 along one edge 56 by the adhesive 60. See Fig. 5. Optionally, a release agent (not shown) may be applied to the mandrel 80 before attaching the patterns to promote release of the finished arrow from the mandrel 80. The release agent is generally a carnuba based wax. In this case, a tacking agent is applied over the release agent to allow the adhesive 60 to stick to the mandrel 80. The tacking agent is preferably an epoxy resin.

The longitudinal pattern 52 and bias pattern 70 are then rolled onto the mandrel 80 as shown by the arrow in Fig. 5. Preferably, the bias pattern 70 is oriented off-center of the longitudinal pattern 52 so that the bias pattern 70 does not wrap around the mandrel 80 until one full wrap of the longitudinal pattern 52 has been applied to the mandrel 80.

To strengthen the arrow 10, multiple layers of longitudinal pattern 52 and bias pattern 70 may be wrapped around the mandrel 80. Preferably, four layers of longitudinal pattern 52 and two layers of bias pattern 70 are wrapped around the mandrel 80.

Applicant has found that the patterns may be best rolled onto the mandrel 80 by using a rolling table from Century Design of San Diego, CA. The rolling table (not shown) has a top portion which slidably engages a bottom portion. The patterns and mandrel are placed on the bottom portion and the top portion rolls over the bottom portion, causing the patterns to roll onto the mandrel. The rolling machine has heated platens that warm the patterns as they are rolled onto the mandrel. The platens may be heated as high as 200 degrees Fahrenheit.

In the next step, the patterns rolled onto the mandrel 80 are covered with a polypropylene tape 82. Applicant has found that a cello wrapping machine from Century Design, San Diego, CA may efficiently be used to apply the tape to the patterns. Fig. 6 shows the resulting layers.

Next, the mandrels are heated to about 250 to 300 degrees Fahrenheit for about 1 hour. The heating step causes the resin 24 to cure, producing a cured product 90. The polypropylene tape 82 prevents the resin 24 from melting and falling off the mandrel 80.

Also, the tape 82 shrinks when heated and creates better laminations of fibers. Heating may be efficiently performed in an oven from Steelman of Fort Worth, TX or Dispatch from Milwaukee, WI.

Next the cured product 90 is removed from the mandrel 80. Fig. 7 shows the mandrel 80 being pulled out of the cured product 90. The optional release agent may aid this process. Applicant has built a "pulling" machine (not shown) which grabs the mandrel by a notch at one end and pulls the mandrel through a hole smaller than the diameter of the cured product 90, stripping the cured product 90 off the mandrel 80.

Next, the tape 82 is removed from the cured product. Preferably, the cello wrapping machine will have wrapped the tape 82 spirally around the patterns so that the tape can be easily unwound as shown in Fig. 8.

The cured product is then sanded to remove edges of the hardened resin left on the cured product 90 by the tape 82. A centerless sander (not shown) from Century Design of San Diego, CA may be used to spin the cured product 90 while it is being sanded.

The cured product is then cut to appropriate lengths to make finished arrows 10. The parallel portion 30 is cut, so that the spine (stiffness) of the arrow remains the same regardless of the finished length.

The finished arrows at their tip may preferably have an outside diameter of about .338 inches and a hollow interior 14 with a diameter of about .287 inches. The finished arrows taper about .004 inch per inch of tapered portion 32. At the knock end, the finished arrows preferably have an outside diameter of about .271 inches and a hollow interior with a diameter of about .212 inches.

The finished graphite arrows 10 have great strength due to the combination of the longitudinally oriented fibers 20 and biased fibers 22. Applicant has found that the arrows 10 have a crush strength about 50% greater than that of earlier graphite arrows such as those from Taylor Falcon of Jonesborough, Arkansas. The arrow 10 will not bend when it hits a

hard object. The arrow will not splinter when it hits a hard object, so that the tip does not get pushed inside the shaft 12.

The arrow 10 is lighter in weight and flies faster than aluminum arrows, developing more kinetic energy.

Because the optional mold release is on the inside of the shaft, not the outside, less extensive sanding is needed than with earlier pultruded graphite arrows.

The characteristics of the arrow 10 allow it to be easily tuned with a fixed blade broadhead tip.

The tapered portion 32 allows easier penetration of a game animal than earlier arrows that were non-tapered.

The arrow 10 has a shorter paradox than earlier arrows and thus has less oscillation along the shaft 12 resulting in higher accuracy in flight, so that it shoots farther with the same accuracy. The shorter paradox also allows greater penetration into a game animal. Paradox is the amount of bowing produced in the shaft when a force is placed against one end of the shaft, such as caused by a bow string. Parallel shafts have greater paradox than tapered shafts.

The arrow 10 also has a greater spine weight range (up to 100 pounds) than earlier arrows. This is advantageous for heavier bow weights (60 pounds and greater) and for finger shooters that don't use a release. The greater spine or stiffer shaft prevents the shaft from wiggling around as the shooter pulls the arrow back.

The arrow 10 also has a front of center (balance point) about 10 to 15% closer towards the tip portion 18 than previous arrows. This enables the arrow 10 to be tuned and fly better with a broad head tip.

The present invention may be embodied in other specific forms without departing from the spirit or essential attributes thereof, and it is therefore desired that the present

embodiment be considered in all respects as illustrative and not restrictive, reference being made to the appended claims rather than to the foregoing description to indicate the scope of the invention.

100227423.016700

WHAT IS CLAIMED:

1. A graphite archery arrow having an elongate shaft, a fletching portion at one end of the shaft, and a tip portion at the opposite end of the shaft, the shaft comprising:
  - (a) a plurality of graphite fibers longitudinally oriented along the shaft;
  - (b) a plurality of graphite fibers biased to the longitudinally oriented graphite fibers; and
  - (c) a binder holding together the longitudinally oriented graphite fibers and the biased graphite fibers.
2. The graphite archery arrow of claim 1, wherein the biased graphite fibers are substantially normal to the longitudinally oriented graphite fibers.
3. The graphite archery arrow of claim 1, wherein the longitudinally oriented graphite fibers have a fiber area weight of about  $120 \text{ g/m}^2$ .
4. The graphite archery arrow of claim 3, wherein the biased graphite fibers have a fiber area weight of about  $70 \text{ g/m}^2$ .
5. The graphite archery arrow of claim 1, wherein the binder is a thermoplastic epoxy resin.
6. The graphite archery arrow of claim 1, further comprising four layers of longitudinally oriented graphite fibers and two layers of biased graphite fibers.
7. The graphite archery arrow of claim 1, the shaft further comprising a parallel portion and a tapered portion.



8. The graphite archery arrow of claim 7, wherein the parallel portion is adjacent the tip portion and the tapered portion is adjacent the fletching portion.

9. The graphite archery arrow of claim 7, wherein the parallel portion is about 40% of the shaft length and the tapered portion is about 60% of the shaft length.

09227129-010709

10. A graphite archery arrow having an elongate shaft, a fletching portion at one end of the shaft, and a tip portion at the opposite end of the shaft, the shaft comprising a parallel portion and a tapered portion.
11. The graphite archery arrow of claim 10, wherein the parallel portion is adjacent the tip portion and the tapered portion is adjacent the fletching portion.
12. The graphite archery arrow of claim 10, wherein the parallel portion is about 40% of the shaft length and the tapered portion is about 60% of the shaft length.

13. A method of manufacturing a graphite arrow composed of longitudinal and biased graphite fibers and having a tapered portion and a parallel portion, comprising the steps of:


- (a) trimming a sheet of graphite fibers to produce an elongate longitudinal pattern having a portion with parallel sides and a portion with tapered sides, the pattern having an adhesive on its back side;
- (b) trimming a sheet of graphite fibers to produce a bias pattern of about the length of the longitudinal pattern and with the graphite fibers biased to the direction of the longitudinal pattern and having a width less than the width of the longitudinal pattern;
- (c) attaching the bias pattern to the longitudinal pattern with the bias pattern offset from the edges of the longitudinal pattern;
- (d) rolling the patterns onto an elongate, tapered mandrel, the pattern being attached to the mandrel by the adhesive;
- (e) covering the patterns on the mandrel with polypropylene tape;
- (f) heating the patterns and polypropylene tape on the mandrel to about 250 to 300 degrees for about 1 hour, producing a cured product;
- (g) removing the cured product from the mandrel;
- (h) removing the tape from the cured product;
- (i) sanding the cured product; and
- (j) cutting the cured product to appropriate arrow lengths.

15. The method of claim 13, further comprising the step of orienting the bias pattern off-center from the longitudinal pattern so that the bias pattern does not wrap around the mandrel until one full wrap of longitudinal pattern has been applied to the mandrel.


16. The method of claim 15, further comprising the step of wrapping four layers of longitudinal pattern followed by two layers of bias pattern around the mandrel.

## ABSTRACT


A graphite archery arrow having an elongate shaft, a fletching portion at one end of the shaft, and a tip portion at the opposite end of the shaft, the shaft consisting of a number of graphite fibers longitudinally oriented along the shaft; a number of graphite fibers biased to the longitudinally oriented graphite fibers; and a binder holding together the longitudinally oriented graphite fibers and the biased graphite fibers. The arrow may also have a tapered portion and a parallel portion. A method of manufacturing the graphite archery arrow is also claimed.




*Fig. 1.*




*Fig. 2.*

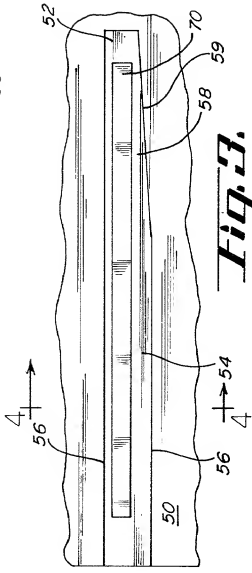

*Fig. 3.*



*Fig. 4.*



*Fig. 5.*

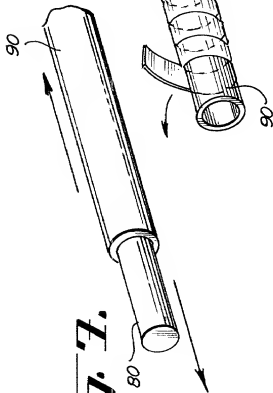


Fig. 7.

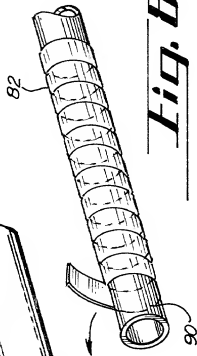


Fig. 8.




Fig. 9.

**DECLARATION AND POWER OF ATTORNEY FOR ORIGINAL APPLICATION**

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below my name; and that I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**GRAPHITE ARROW AND METHOD OF MANUFACTURE**

the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-entitled specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 35 U.S.C. §120 and Title 37, Code of Federal Regulations, §1.56(a).

If this application is a continuation, or a continuation-in-part application filed under the conditions specified in 35 U.S.C. §120 or 37 C.F.R. §1.53, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in said §1.56, which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby appoint the following attorneys to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected therewith: Gerald E. Helget (Reg. No. 30,948) and Nelson R. Capes (Reg. No. 37,106).

Please direct all telephone calls to attorney Gerald E. Helget at (612) 305-1416.

Please address all correspondence to:

MACKALL, CROUNSE & MOORE, PLC  
1400 AT&T Tower  
901 Marquette Avenue  
Minneapolis, MN 55402-2859

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further acknowledge being warned that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and may jeopardize the validity of the application or any patent issued thereon.


FULL NAME OF FIRST INVENTOR IS: Glen E. Thurber

INVENTOR'S SIGNATURE

Residence Address:

Post Office Address:

Citizenship:

  
3530 Southeast 21st Street, Topeka, Kansas 66607  
3530 Southeast 21st Street, Topeka, Kansas 66607  
United States of America

DATE 1-2-99